

Mac wi-fi Driver Connection Guide

(MAC 14.6 for example)

I .Pre-installation preparations:

- ①the printer is connected to the power supply, turns on the power switch, and starts the printer;
- ②Connect the MAC to the printer using a USB cable
- ③download the corresponding printer driver from the website.

II .Driver installation steps:

- ①Double-click to open the“Pkg” driver installer (as shown in Fig. 1)

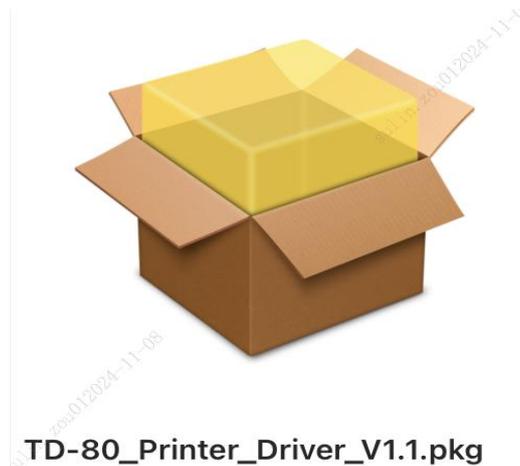


Fig. 1

- ② Go to the printer driver installation screen, click on the bottom right corner of the screen“Continue” button (as shown in Fig. 2)

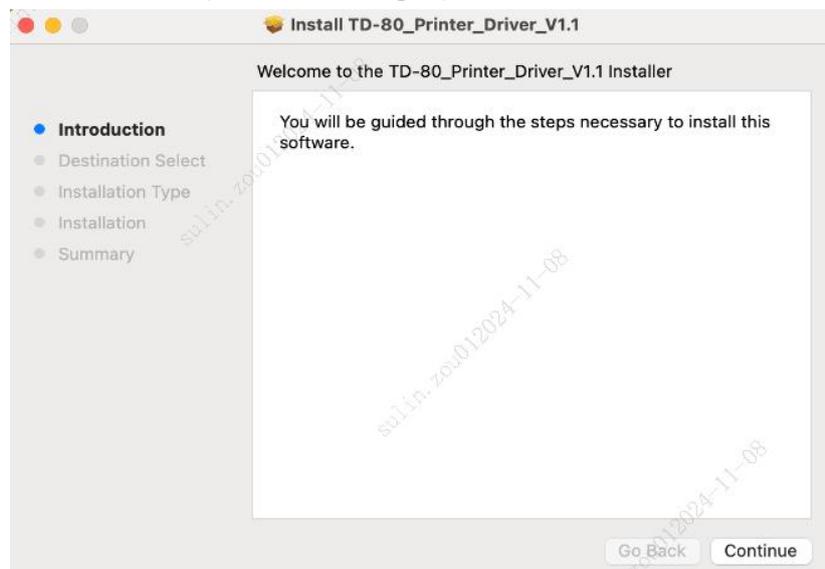


Fig. 2

③ go directly to the “Install type” screen and click “Install” (as shown in Fig. 3)

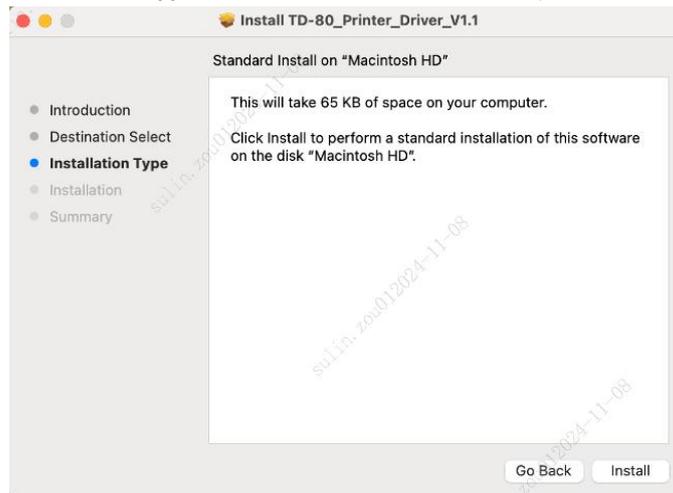


Fig. 3

④ installer will enter the password authentication pop-up window, enter the computer password, click “Install Software” (as shown in Fig. 4)

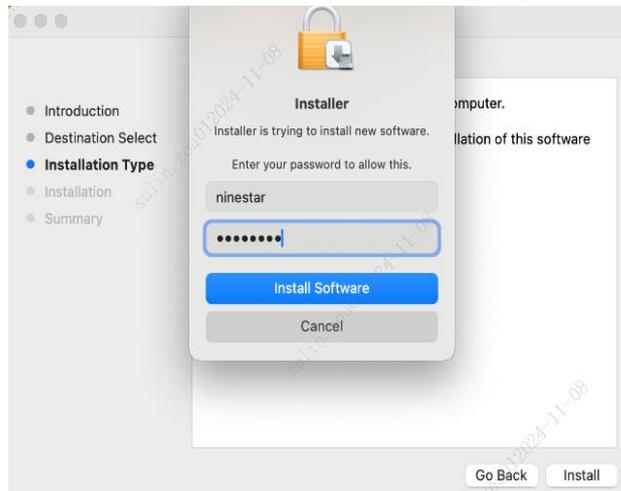


Fig. 4

⑤ go to the installation screen and wait for the driver to install (as shown in Fig. 5)

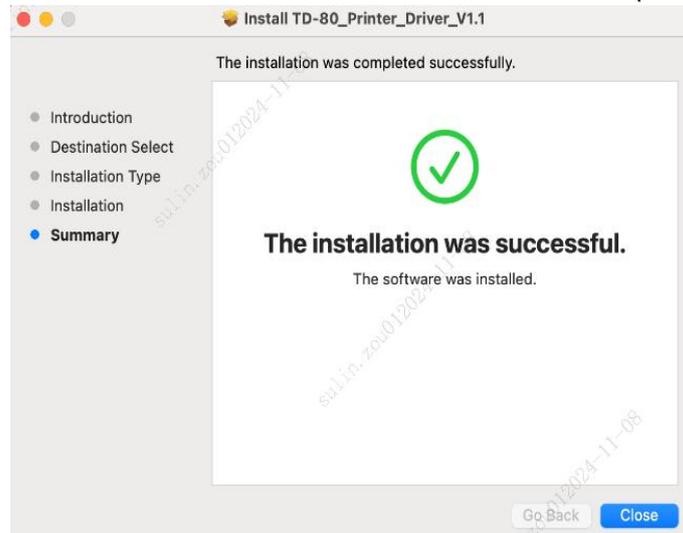


Fig. 5

III. How to add a wifi printer:

1. Add WiFi drivers in AP mode:

① connect your computer and printer with a USB cable, open the ticket machine setup tool, click "USB connection port" in the ticket machine setup tool and select the printer model in the list, and click WiFi settings (as shown in Fig. 6)

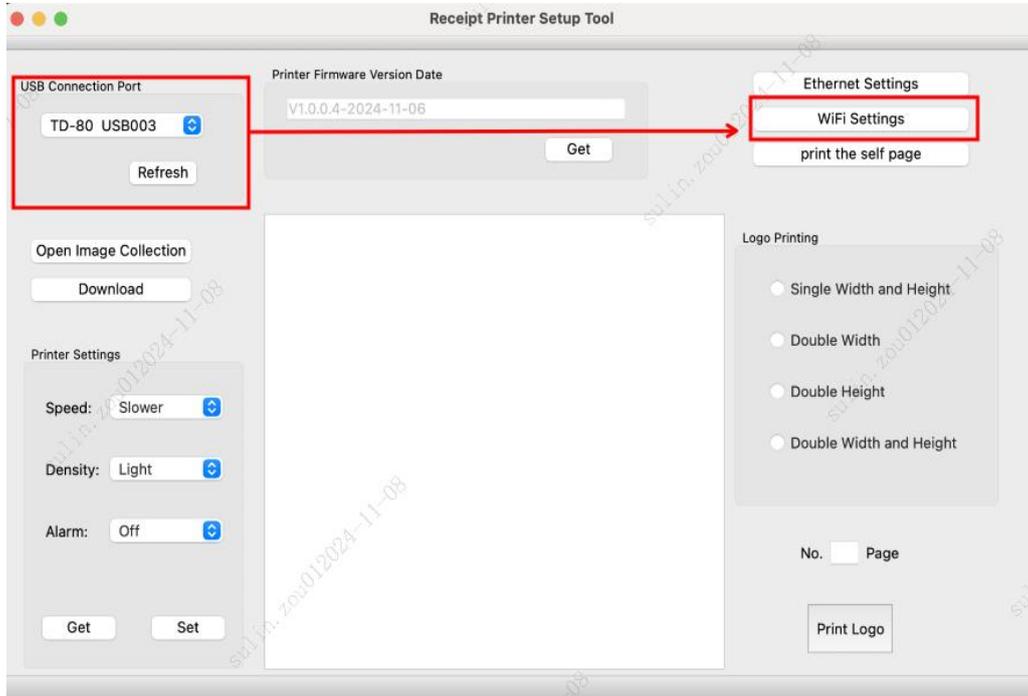


Fig. 6

② click "Get" to get the AP address (Fig. 7)

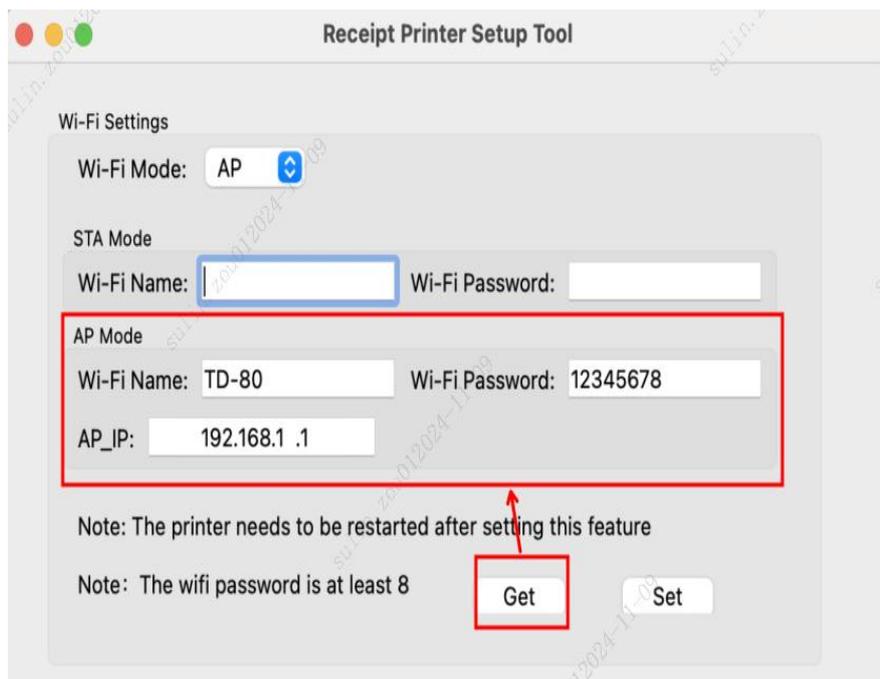


Fig. 7

③ connect the printer wi-fi and input the password on the computer, wait for the wi-fi connection (as shown in Fig. 8) .

Note: Printer Wi-fi name and password can be inquired by printing self-test page;

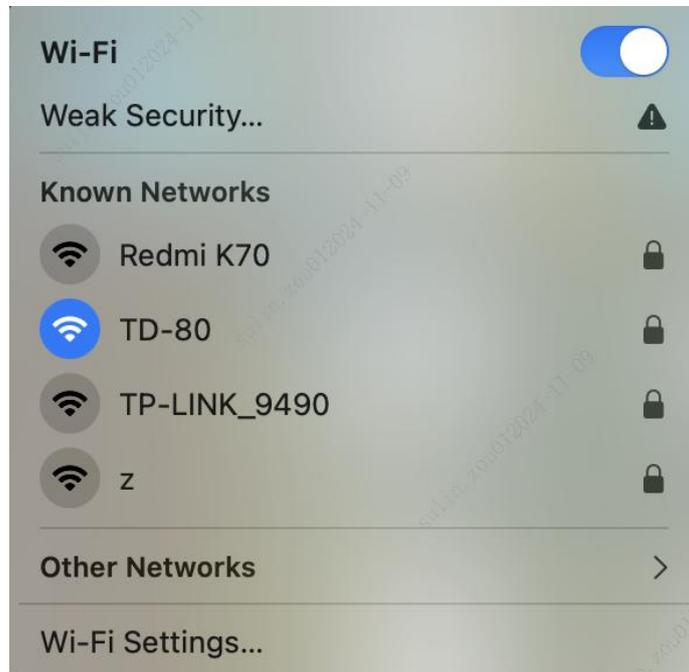


Fig. 8

④ go to the system settings screen, slide the left side of the function to the bottom, select“Printer and scanner”, click“Add printer, scanner or fax machine” button (as shown in Fig. 9)

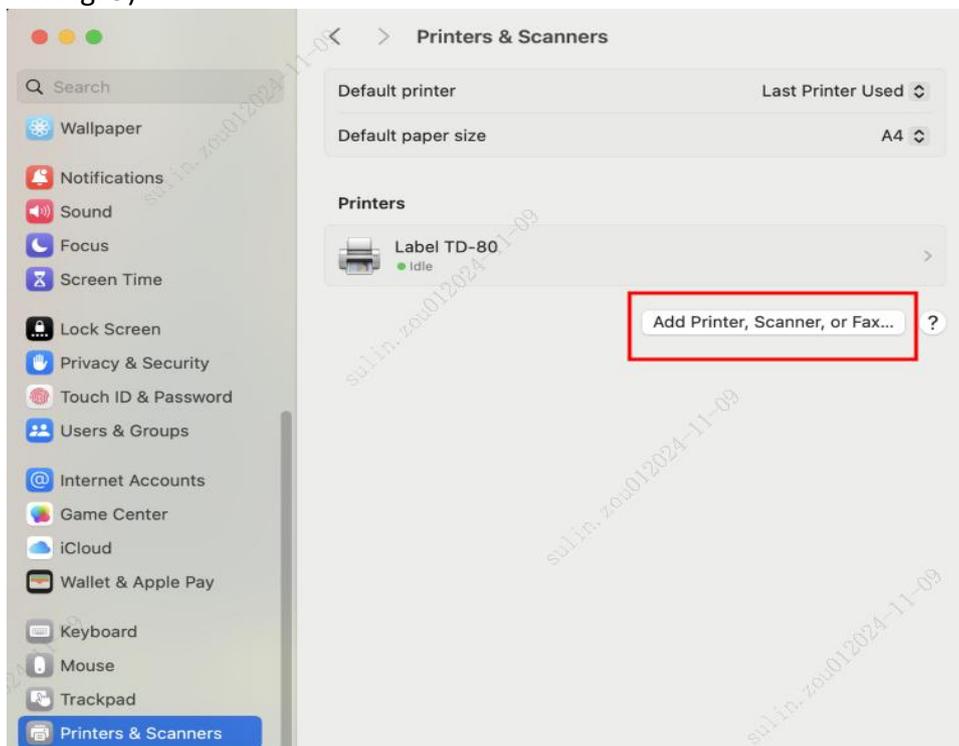


Fig. 9

- ⑤ click the “IP” icon in the add screen and select “HP Jetdirect-Socket”(Socket only) from the options in the protocol bar (as shown in Fig. 10)

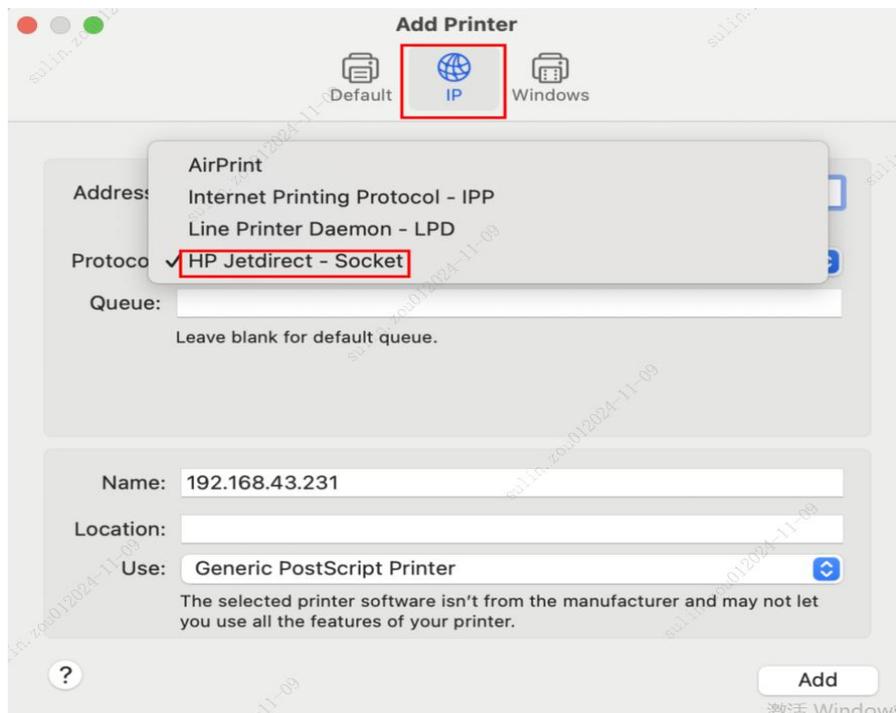


Fig. 10

- ⑥ enter the printer IP address in the address bar and use the bar to select “Select Software”(as shown in Fig. 11)

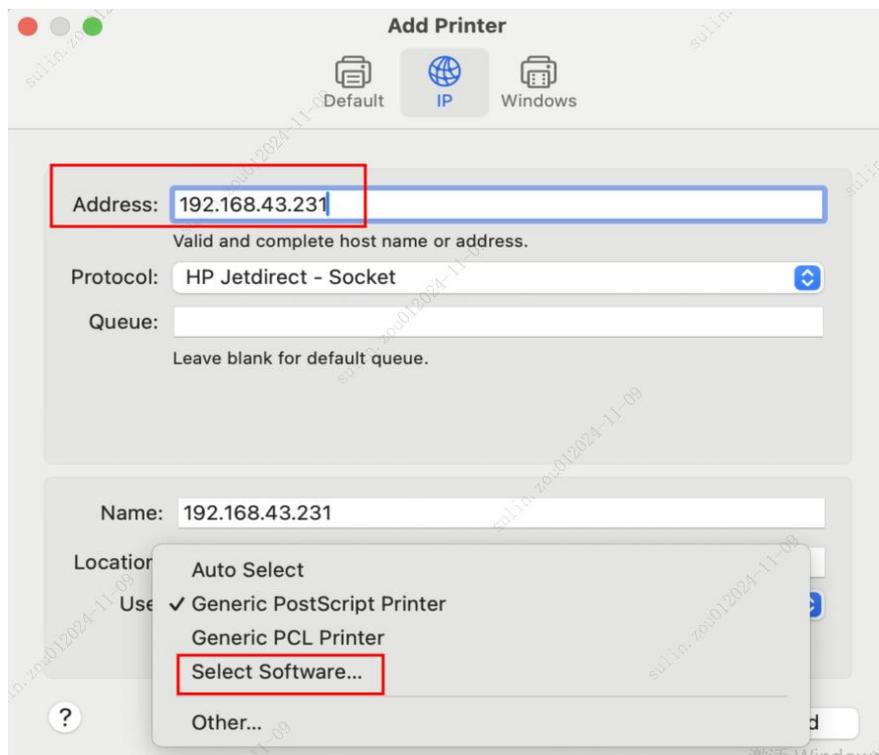


Fig. 11

⑦ go to the “Printer software” selection screen, find the right printer driver in the screen, click “OK”, and then click the “Add” button (as shown in Fig. 12,13)

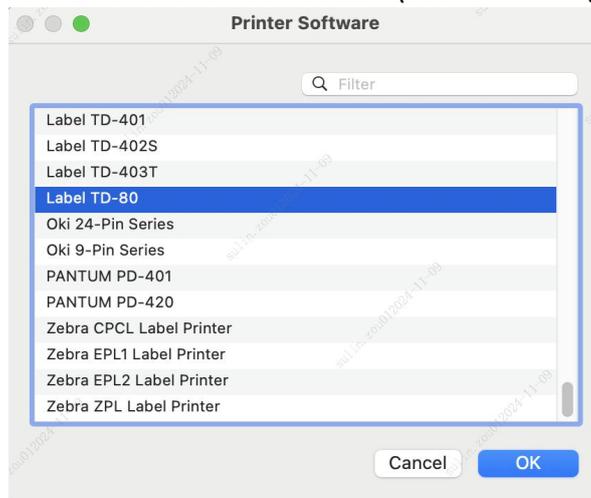


Fig. 12

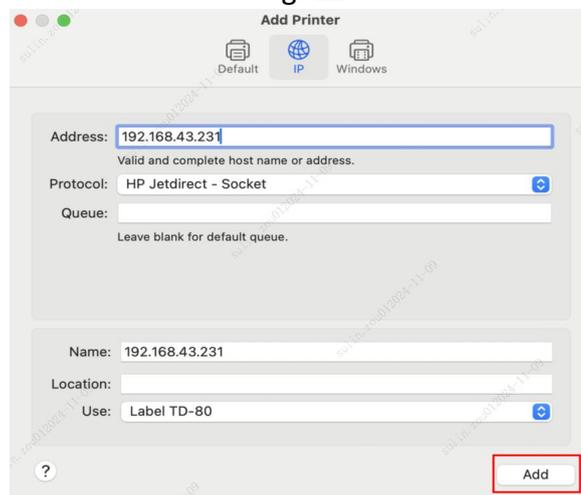


Fig. 13

⑧ after the successful addition, in the “Printer and scanner” screen display has been added successfully the printer (as shown in Fig. 15)(Note: the printer name can be modified by adding custom)

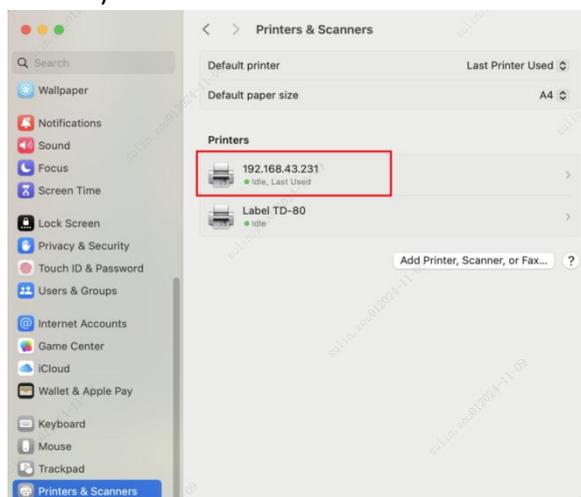


Fig. 15

2. Adding WiFi drivers in STA mode:

① connect your computer and printer with a USB cable, open the ticket machine setup tool, click“USB connection port” in the ticket setup tool and select the printer model in the list, and click WiFi settings (as shown in Fig. 16)

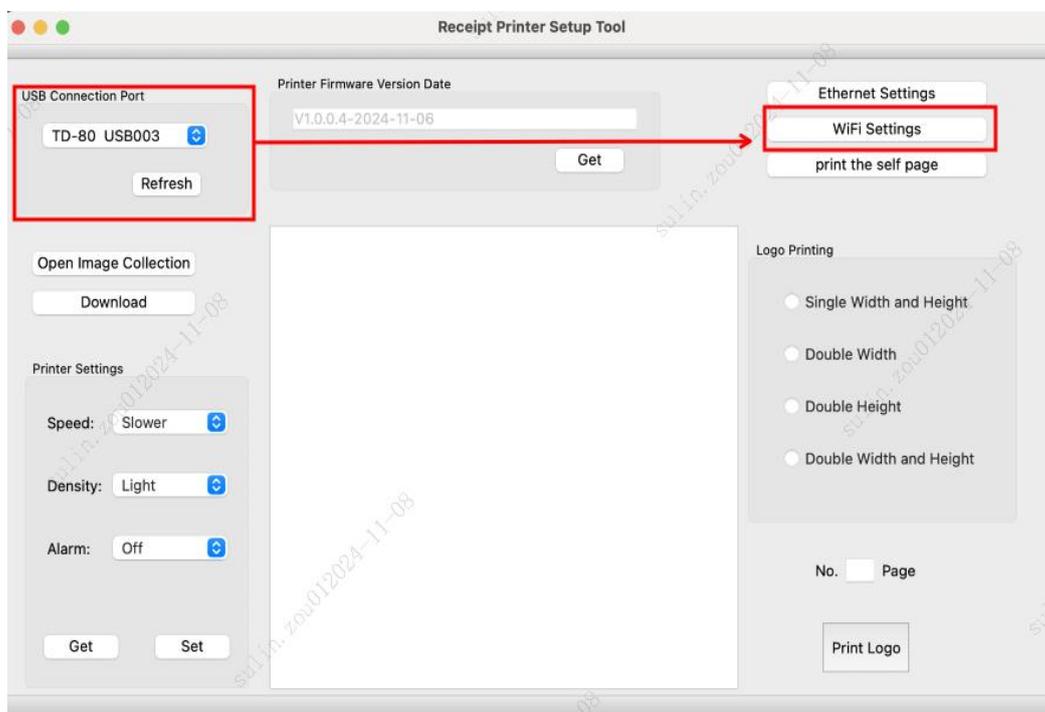


Fig. 16

② Click“Get”, switch to STA mode in the WiFi settings screen, and click“Settings”, in the WiFi settings screen, enter the router hotspot name and password you want to conFig. in“STA mode” and click the“Settings” button (Fig. 17)

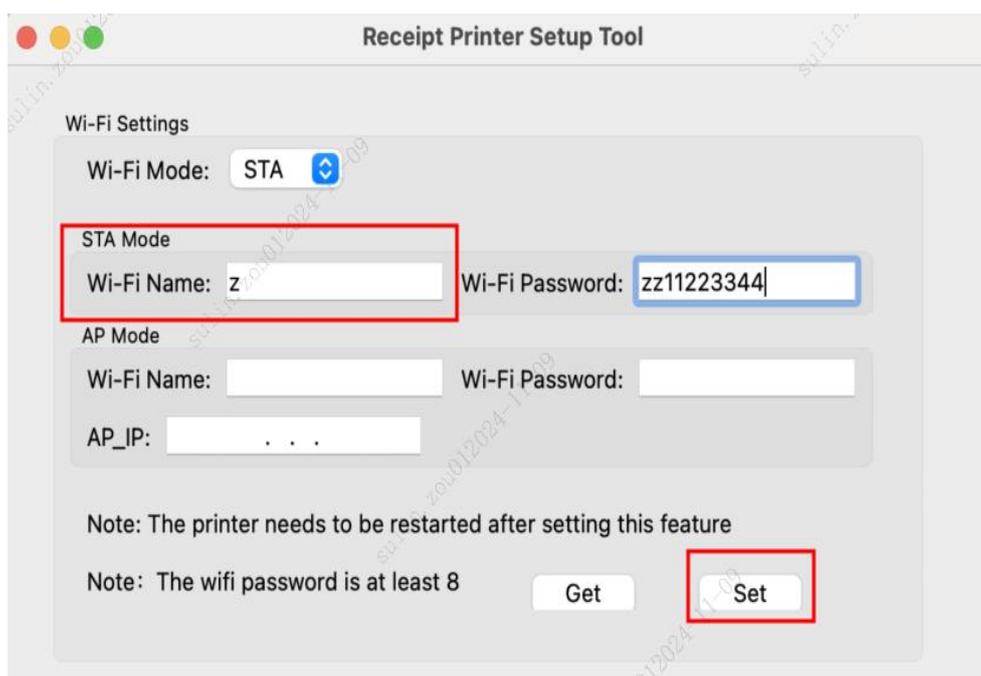


Fig. 17

③ In the WiFi settings screen, click the “Read” button to get the WiFi address (in DHCP ON IP mode, as shown in Fig. 18) . If the IP mode is “DHCP OFF”, select “DHCP ON” for IP mode in “WiFi settings”, click “Settings”, and then click “Read”

Note: If the IP address can not be obtained, check if the IP mode is “DHCP OFF” or if the configuration hotspot name and password entered are incorrect



Fig. 18

④ connect the printer wi-fi and input the password on the computer, wait for the wi-fi connection (as shown in Fig. 19) .

Note: Printer Wi-fi name and password can be inquired by printing self-test page;

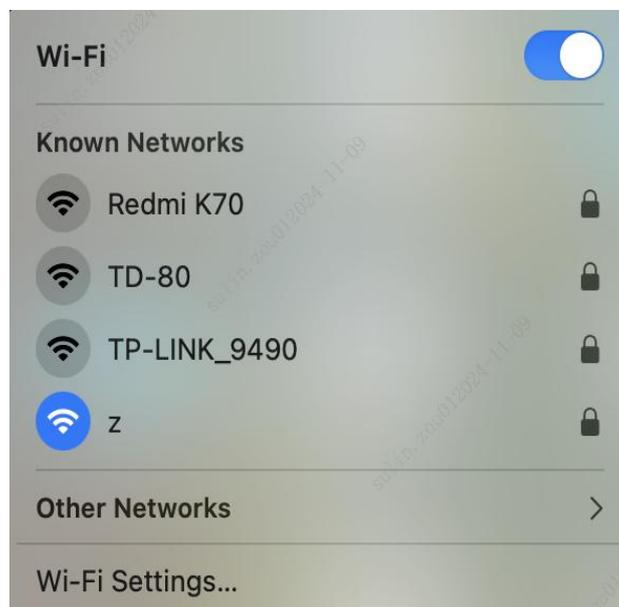


Fig. 19

Note: Follow steps 4-8 above to add a WiFi driver in STA mode

III. print the test page:

① Click add successful printer driver to enter the printer driver screen (as shown in Fig. 20)

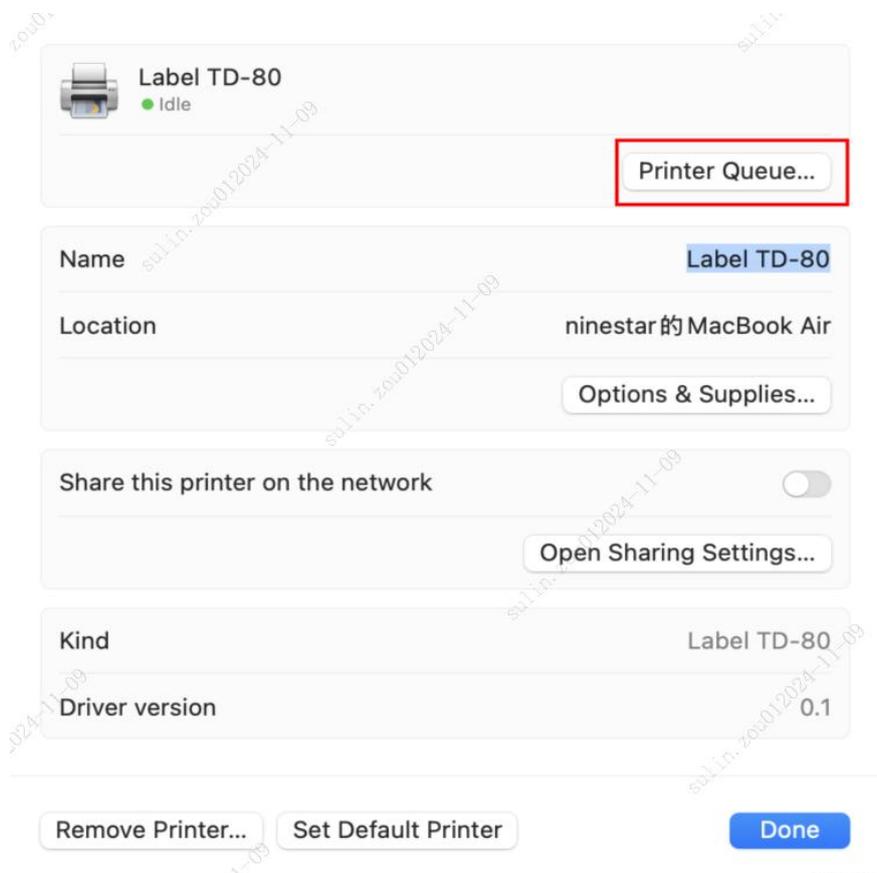


Fig. 20

② click on“Queue in printer...” in the printer driver screen to open the driver print pool (as shown in Fig. 21)

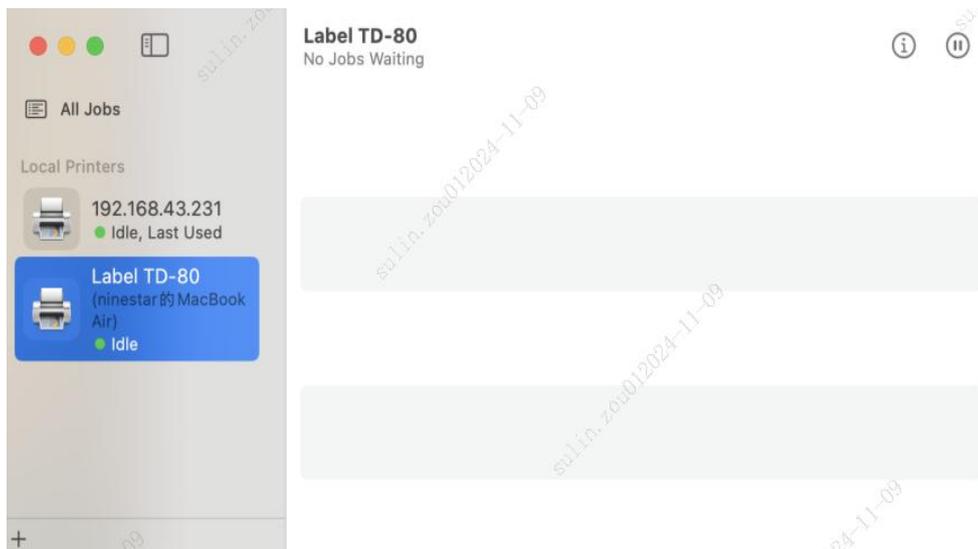


Fig. 21

③ click on the top left corner of the computer desktop“Printer” button, select“Print test page”(as shown in Fig. 22) , wait for the test page to print (as shown in Fig. 23)

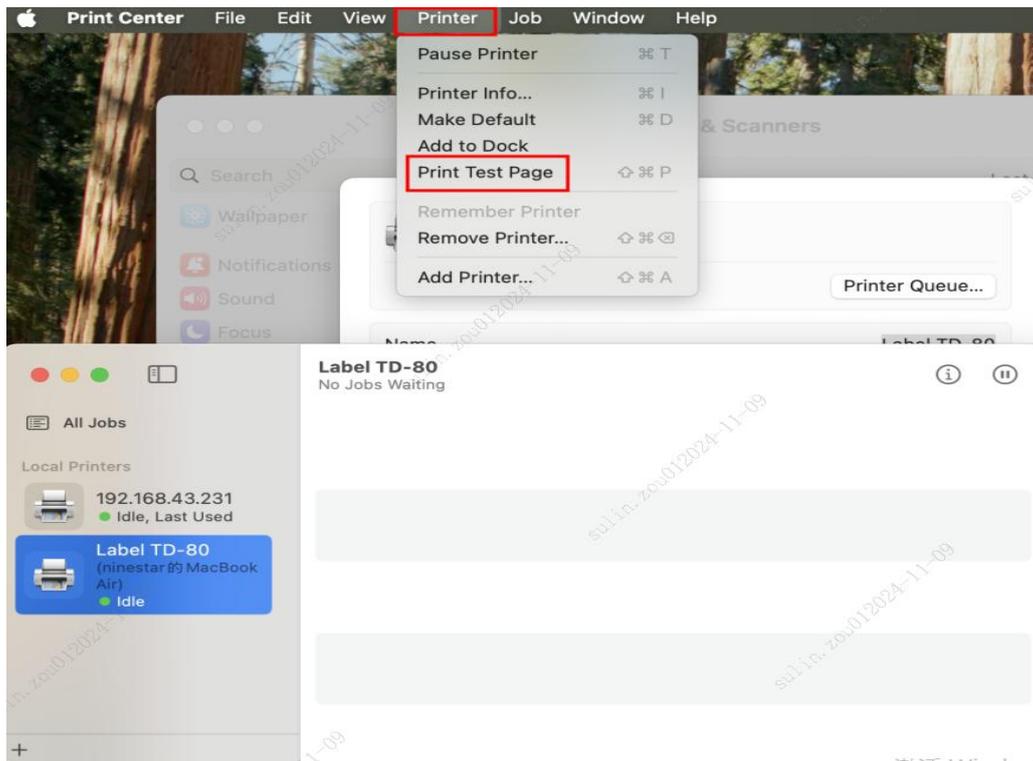


Fig. 22

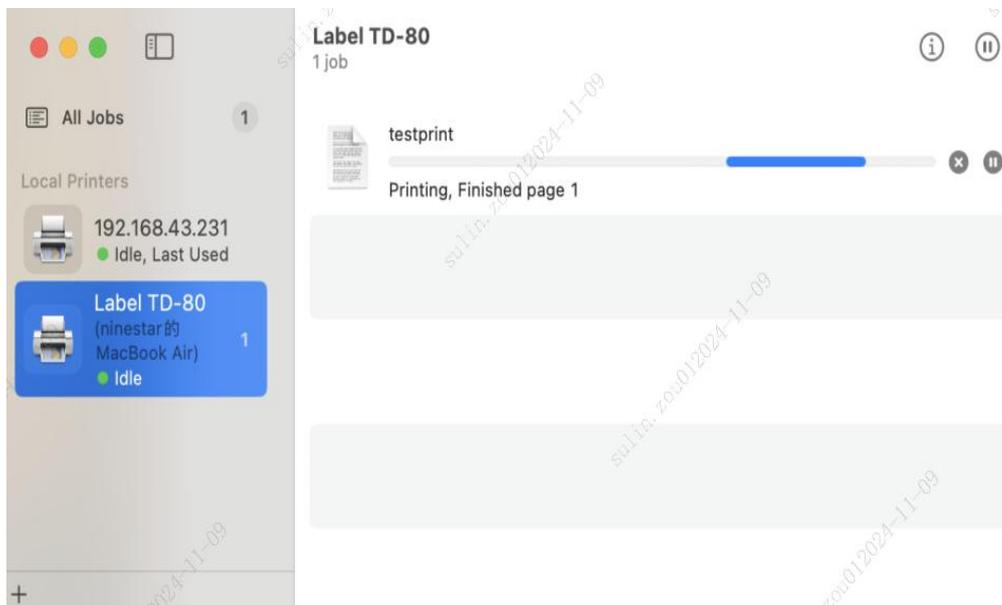


Fig. 23

IV. Set tool to switch WiFi mode

1. STA mode switch AP mode method:

① Click "Get", switch to AP mode in the WiFi settings screen, click "Settings", and then click "Read" to get the AP address (as shown in Figs 24 and 25)

Note: Switching to AP mode requires restarting the printer

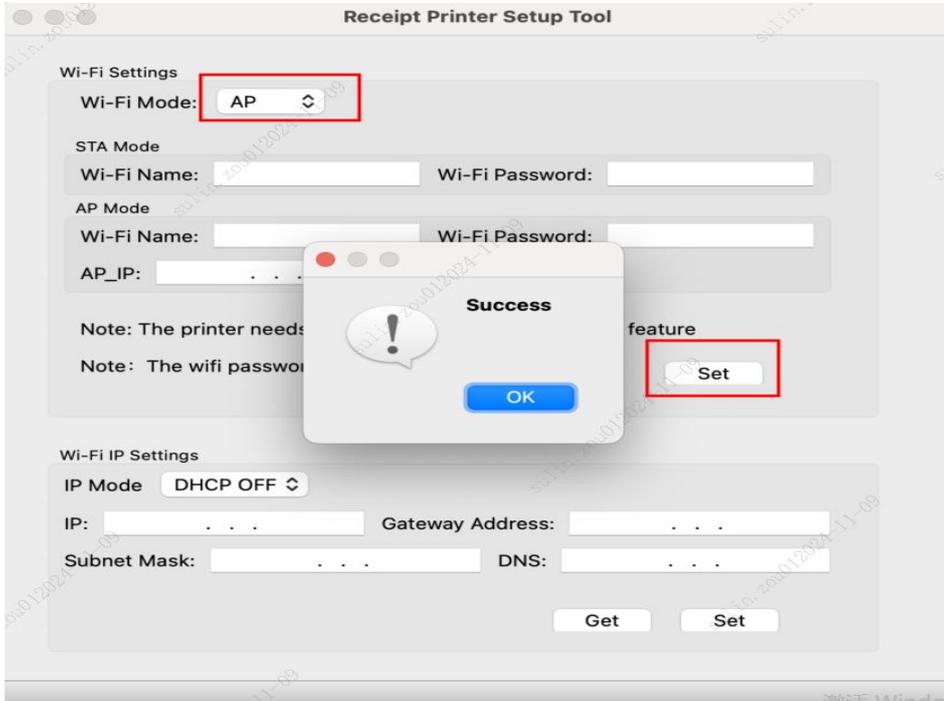


Fig. 24

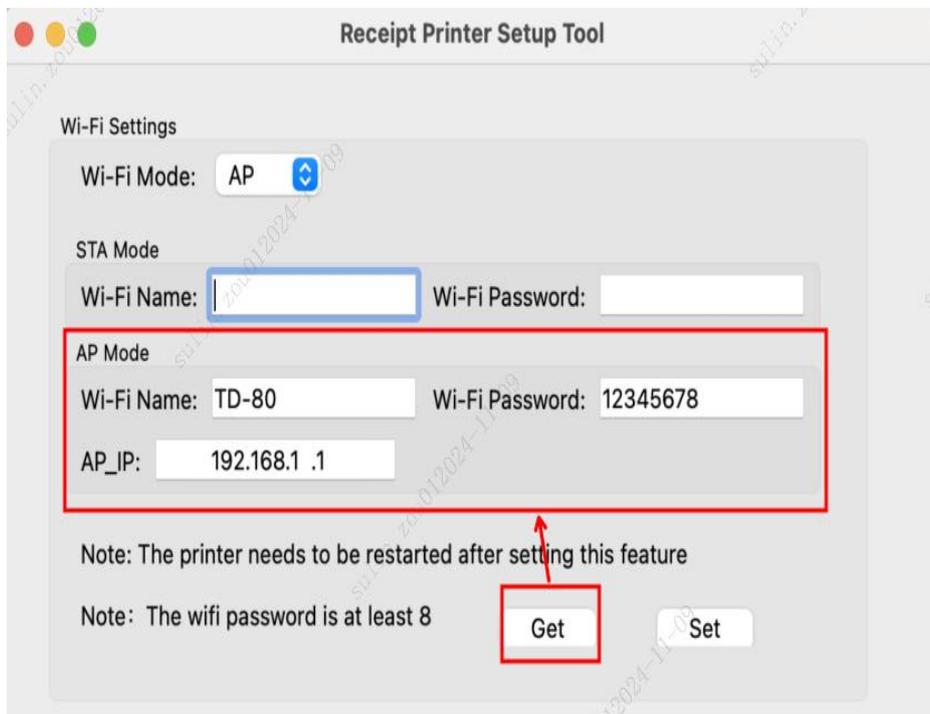


Fig. 25